

# Towing

Your Comprehensive Source For Towing Products



Hitches | Weight Distribution | 5th Wheel | Gooseneck | Tow Bars | Accessories

## What's Inside:

- Hitch Selection Guide
- Proper Ball & Ball Mount Selection Guides
- Plus Much More!

# HITCH SELECTION GUIDE

Before you begin the hitch selection process, it's important that you realize that the hitch by itself will not provide you with the ability to tow. In addition to the hitch, you must have towing components such as a hitch ball and/or ball mount, wiring and safety chains in order to safely and legally tow your tow vehicle and trailer.

## STEP 1:

### Tow Vehicle

Find out the following about the your tow vehicle:

- Make and model
- Model year
- Passenger, suv, truck or van
- Two or four doors
- Manual or automatic transmission
- Vehicle's maximum towing capacity

## STEP 2:

### Determine GTW & TW Capacities

The two most important factors in selecting towing equipment are gross trailer weight (GTW) and tongue weight (TW).

### For The Trailer:

Gross trailer weight (GTW) is the weight of the trailer fully loaded in its actual towing condition.

GTW is measured by placing the fully loaded trailer on a vehicle scale. The entire weight of the trailer should be supported on the scale as shown in **Figure 1**. Tongue weight (TW) is the downward force exerted on the hitch ball by the trailer coupler. In most cases, it is about 10 to 15 percent of GTW.

TW of up to 300 lbs. can be measured on a household scale by resting the trailer coupler on the scale and placing the scale on a box so that the coupler is at its normal towing height. The trailer must be fully loaded and level.

For heavier tongue weights, place a household scale and a brick that's as thick as the scale three feet apart as shown in **Figure 2**. Set a length of pipe on each end and rest a beam across the pipes. Re-zero the scale to correct for the weight of the beam and pipe. Rest the trailer jack on the beam as shown, one foot from the brick and two feet from the scale.

To obtain the TW, multiply the scale reading by three. For greater tongue weights, place the scale and brick four feet apart, rest the jack on the beam three feet from the scale and multiply the scale reading by four.

### For The Tow Vehicle:

Like the trailer, the tow vehicle has a maximum weight capacity it was designed to tow. Its maximum towing capacity can be found in the owner's manual.


## STEP 3:

### Match The Tow Vehicle & Trailer

For safety, make sure your tow vehicle is capable of towing the intended trailer. Neither the vehicle nor the trailer alone can determine the right hitch for the situation. They work together, and in no case should the trailer's GTW and TW exceed the vehicle's maximum towing capacity.



4,000 lbs. (GTW)  
850 lbs. (TW)



1,500 lbs. (GTW)  
150 lbs. (TW)

Correct

Incorrect

Warning:  
Never Exceed The Vehicle Manufacturers  
Maximum Towing Capacity.

## To Tow You Need Three Things



Tow Vehicle



Towing Package



Trailer

## STEP 4:

### Determine Hitch Type Weight-Carrying Hitches

Weight-carrying hitches are generally used for lightweight trailers up to 3,500 lbs. GTW and 300 lbs. TW. Certain vehicles such as pickups, vans and utility vehicles with built-in extra cargo capacity can use weight-carrying hitches for higher loads. Weight carrying hitches support the trailer tongue weight (TW), just as though it were luggage located at the hitch ball.

There are two basic styles of weight-carrying hitches:

- Fixed Drawbar — The ball platform is a permanent member welded to the hitch.
- Removable Drawbar — The ball platform is removable. In Classes I and II, it's called a drawbar, and in Class III, it's called a ball mount.

### Weight-Distributing Hitches


Rather than merely supporting the trailer tongue weight (TW), weight-distributing hitches apply leverage between the towing vehicle and trailer causing the TW to be carried by all axles of the tow vehicle and trailer.

When TW is distributed in this way, trailers with greater TWs can be towed, resulting in a more level ride which reduces stress on the rear of the tow vehicle and provides greater steering and brake control. Weight distributing hitches are selected on the basis of GTW and TW, and to some extent on the weight to be carried in the towing vehicle. For example, a weight-distributing hitch rated for 7,500 lbs. GTW and 750 lbs. TW should be used for a 5,500 lbs. GTW trailer with 600 lbs. TW, where the towing vehicle will also be carrying 150 lbs. in the bed or trunk.

A weight-distributing system includes a receiver hitch attached to the tow vehicle, a removable hitch head and spring bar assembly that fits into the receiver opening and hook-up brackets that connect the spring bars to the trailer frame.

*Note: Air Springs, Air Shocks And Overload Springs*

*These devices help the tow vehicle's rear suspension support trailer tongue weight as well as the weight of passengers and luggage. They are particularly useful on "soft-sprung" vehicles or those whose springs have settled. They are not substitutes for weight distributing hitches, since they do not re-distribute load to other axles.*



### HOW TO USE THE QUICK SELECTION CHART

Find the tow vehicle and size at left and the trailer size and GTW along the top. Where the boxes meet, you'll find the types of hitches that will work for that combination. NOTE: This chart is a general guide, and the specific weights and capacities of the actual trailer, tow vehicle and available hitch must be known in each case.

TOW VEHICLES	Weight-Carrying				W/CWD
	Class I Up to 2,000 lbs. (GTW) Up to 200 lbs. (TW)	Class II 2,001 - 3,500 lbs. (GTW) 201 - 300 lbs. (TW)	Class III 3,501 - 5,000 lbs. (GTW) 301 - 500 lbs. (TW)	Class IV 5,001 - 14,000 lbs. (GTW) 501 - 1,400 lbs. (TW)	
Subcompact/Compact Cars	Class I Sportframe				
Mid-Size Cars/Small Pickups	Class I Class I Sportframe	Class II Frame Hitch	Class III Receiver		
Minivans & Sport Utility Vehicles	Class I Class I Sportframe	Class II Frame Hitch	Class III Receiver		
Full-Size Cars, Pickups, Vans, Utility Vehicles	Class I Sportframe	Class II Frame Hitch	Class III Receiver	Class IV Weight-Distributing Hitch	

# CLASS I & II HITCHES

## Hitches for Cars and CUVs

Class I Tow up to 2,000 lbs. & Class II Tow up to 3,500 lbs.\*

**Valley**

- Class I designed for light trailer towing
- Class II for towing up to 3,500 lbs.
- Will accommodate trailer ball up to 3/4" shank
- Receiver style includes removable black painted ball mount, hitch pin & clip and receiver cover



**DRAW-TITE®**

### Class I Sportframe

Rated up to 2,000 lbs.

- 1-1/4" square receiver tube opening
- Comes complete with removable drawbar, pin and clip

24000 Series



### Class II Frame Hitch

Rated up to 3,500 lbs.

- 1-1/4" square receiver tube opening
- Receiver style hitch with removable drawbar
- Includes drawbar, pin and clip

36000 Series



Valley Part No.	Drawtite Part No.	Class I & II Hitches Description
-	36427	07-09 Acura RDX
82000	36361	05-09 Chevy Uplander; 05-07 Buick Terraza / Saturn Relay
82000	36361	97-05 Chevy Venture / Pontiac Transport / Olds. Silhouette
-	36455	08-09 Dodge Caravan / Chrysler Town & Country
59080	-	07-09 Dodge Caliber
-	36360	05-07 Ford Five Hundred / Mercury Montego
-	36360	08-09 Ford Taurus / Mercury Sable
-	36447	07-09 Ford Edge / Lincoln MKX
-	36420	05-09 Ford Escape / Mazda Tribute / Mercury Mariner
-	24792	07-09 Honda CR-V
-	24776	07-08 Honda Fit
65310	-	03-08 Honda Pilot
-	36363	05-09 Hyundai Tucson / Kia Sportage
-	36423	07-09 Jeep® Compass / Patriot
-	36451	08-09 Jeep® Liberty
-	36362	05-09 Jeep® Grand Cherokee / Commander
-	36419	07-09 Mazda CX-7
66490	24788	04-08 Nissan Maxima; 02-06 Altima
-	36450	08-09 Saturn Vue
-	36416	07-09 Toyota Camry
-	36455	2009 VW Routon
-	36474	2009 VW Tiguan

Many More Applications Available, Call Us Now!\*

**SWIFT HITCH**



Part No. SH01

No more guessing, no more getting in and out of the truck...with the Swift Hitch wireless camera system hooking up to your trailer has never been easier.

### Portable Wireless Full Color Back-Up Camera System

- Wireless camera system includes camera, handheld monitor, 2 carrying cases, and 12V charging cable.
- Charging cable charges both the camera and monitor at the same time
- To aid in backing up, image can be displayed normal or in reverse
- Built-in infrared lights allow for 15' of night vision range (turns on/off automatically)
- Easy to use, single hand operation
- Work Time: 5 hours (infrared off) / 2 hours (infrared on)
- Magnetic Mount Bracket Dimensions: 2-3/8" x 1-1/2"
- Mounting Holes (optional): 1-5/8" on center
- 2.5" TFT LCD with 960 x 240 resolution



### Hitch Covers For 1-1/4" Receivers

- Cast in a durable, non-corrosive, metal alloy
- Hard enamel colorfill



Official Tailgater  
Part No. 40171



American Flag  
Part No. 20020



Firefighter's Cross  
Part No. 20023

Many More Hitch Cover Styles Available For 1 1/4 and 2" Hitches Ask Us How We Can Help You. See Page 11.

Hitches Available To Fit Most Popular Vehicles.  
Call Us For Your Specific Vehicle.

## Tip:

A Hitch is also the mounting point for a variety of rack and cargo haulers, including bike racks, ski racks, cargo boxes & mobility scooter carriers. See page 16.



\*Never exceed the vehicle manufacturers maximum rated towing capacity.

Jeep® is a registered trademark of Chrysler LLC.

More Applications Available. 1

# CLASS III & IV HITCHES

Most Class III & IV Receivers Tow Up To 10,000 Lbs. With Weight Distribution Hitch.



## Class III & IV Max-Frame Receivers

Rated up to 11,000 lbs. with weight distribution

- 2" square receiver tube opening
- Max-Frame receivers are designed for customers with trucks, vans and sport utility vehicles
- Includes boxed black utility ball mount, pin and clip (kit 2923)

Part No. 2923 - Standard



## Class III

Designed to be the best fitting and best looking Class III/IV Receiver Hitches. Valley offers the most innovative design for two of the most popular pickup applications.



## Class IV

These Power Pull Hitches are available in nine part numbers and offer maximum capacity towing for full size long wheel base pickups.



## Class V Power Pull Xtreme Series Receivers

Class V rating for this popular hitch is up to 12,000 lbs. weight carrying and up to 15,000 lbs. weight distributing.

- 2-1/2" Receiver opening

Part No.	Application	Gross Trailer Wt.	Tongue Wt.
82153	01-06 Chevrolet Silverado 2500HD-3500 P/U	12,000 lb.	15,000 lb.
82153	01-06 GMC Sierra 2500HD-3500 P/U	12,000 lb.	15,000 lb.
<b>Dodge Full-Size Pickups</b>			
82792	06-08 Dodge Ram Pickup 2500 & 3500	12,000 lb.	15,000 lb.
82672	03-05 Dodge Ram Pickup 2500HD & 3500	12,000 lb.	15,000 lb.
<b>Ford Full-Size Pickups</b>			
82502	99-08 F-250 SD, F-350 P/U (w/18" Spare Tire) '08 F-450	12,000 lb.	15,000 lb.

Applications	Valley Part No.		Draw-Tite Part No.	
	WC	WD*	WC	WD*
07-09 Acura RDX	82112	4,000	75563	4,000
05-07 Buick Terraza / Saturn Relay	—	—	75278	3,500 / 5,000
99-09 Chevy Silverado / GMC Sierra	82123	6,000 / 10,000	75362	6,000 / 8,000 / 11,000
			41932	2,000 / 14,000
	82170	6,000 / 10,000	75362	6,000 / 8,000
			75161	6,000 / 7,500
			75521	6,000 / 10,000
			41534	6,000 / 12,000
			41932	12,000 / 14,000
00-09 Chevy Silverado / GMC Sierra HD			75110	5,000 / 8,000
			41540	8,000 / 12,000
			75528	5,000 / 5,000
00-06 Chevy/GMC Suburban / Tahoe / Yukon	81990	6,000 / 10,000	75132	5,000 / 8,000
08-09 Chevy Traverse / Buick Enclave			41540	8,000 / 12,000
05-09 Chevy Uplander			75528	5,000 / 5,000
97-05 Chevy Venture / Pontiac Transport / Olds. Silhouette	82350	3,500 / 5,000	75278	3,500 / 5,000
04-06 Chrysler Pacifica	—	—	75522	3,500 / 5,000
08-09 Dodge Caravan / Chrysler Town & Country	82683	4,000 / 5,000	75579	4,000 / 5,000
05-09 Dodge Dakota P/U	82800	5,000 / 7,500	75251	5,000 / 8,000
07-09 Dodge Nitro	82052	3,500 / 5,000	75517	5,000 / 6,000
2009 Dodge Ram			75662	6,000 / 10,000
02-09 Dodge Ram (except 2009 1500)	82600	5,000 / 10,000	75151	5,000 / 8,000
07-09 Ford Edge / Lincoln MKX	82162	4,000	75526	3,500
05-09 Ford Escape / Mazda Tribute / Mercury Mariner	82211	4,000 / 5,000	75281	3,500 / 5,000
05-07 Ford Five Hundred / Mercury Montego	—	—	75299	3,500 / 4,000
2009 Ford F-150	82843	6,000 / 12,000	75651	6,000 / 11,000
06-08 Ford F-150	82842	6,000 / 12,000	41933	10,000 / 12,000
99-09 Ford F-250/350 Super Duty	81760	6,000 / 10,000	41931	12,000 / 15,000
99-09 Ford F-450/550 Super Duty Cab & Chassis (w/ 34" wide frame)	82410	10,000 / 12,000	41547	6,000 / 12,000
			41927	12,000 / 15,000
08-09 Ford Taurus / Mercury Sable	—	—	75299	3,500 / 4,000
07-09 GMC Acadia / Saturn Outlook	82541	4,000 / 5,000	75528	5,000 / 5,000
07-09 Honda CR-V	82163	—	75547	3,500
03-08 Honda Pilot	82110	3,500 / 5,000	75569	3,500 / 5,000
07-09 Hyundai Santa Fe	82753	4,000	75471	3,500
05-09 Hyundai Tucson / Kia Sportage	—	—	75561	3,500
07-09 Jeep® Compass / Patriot	—	—	75513	3,500
05-09 Jeep® Grand Cherokee / Commander	82810	5,000 / 8,000	75338	5,000 / 7,500
08-09 Jeep® Liberty	—	—	75578	5,000 / 7,500
07-09 Mazda CX-7	—	—	75512	3,500
07-09 Mazda CX-9	—	—	75531	4,000 / 4,000
04-08 Nissan Armada	82720	6,000 / 10,000	41550	6,000 / 10,000
05-09 Nissan Frontier	81250	5,000 / 6,000	75282	5,000 / 8,000
08-09 Nissan Rogue	—	—	75606	3,500
04-08 Nissan Titan	82740	6,000 / 10,000	41551	6,000 / 10,000
05-09 Nissan Xterra	—	—	75291	3,500 / 5,500
08-09 Saturn Vue	—	—	75556	4,000 / 4,000
06-09 Subaru Tribeca	81802	3,500 / 4,000	75401	3,500 / 4,000
03-09 Toyota 4Runner	82691	5,000 / 6,000	75155	6,000 / 7,300
07-09 Toyota FJ Cruiser	—	—	75461	5,000 / 6,000
08-09 Toyota Highlander	—	—	75586	5,000 / 5,000
06-09 Toyota RAV-4	81642	3,500	75432	3,500 / 4,000
05-09 Toyota Tacoma	82790	5,000 / 6,000	75236	5,000 / 5,500
07-09 Toyota Tundra	81881	6,000 / 10,000	75527	6,000 / 8,000
2009 VW Routan	82683	4,000 / 5,000	75579	4,000 / 5,000
2009 VW Tiguan	—	—	75658	3,500

\* WC = Weight Carrying / WD = Weight Distributing

## REESE

### Class V Titan™ Receivers

- Large 2-1/2" square receiver opening allows for larger capabilities
- Designed for heavy duty use
- Ideal for high tongue weight applications. (Toy Haulers & Commercial)
- Maximum rated capacity up to 18,000 lbs.



Part No.	Application
45007	96-09 Chevy Express Van/GMC Savana Van
45016	99-06 Chevy Silverado / GMC Sierra HD
45288	03-09 Dodge Ram (except 2009 1500)
45008	99-09 Ford F-250/350 Super Duty
45014	99-08 Ford F-450/550 Super Duty
45002	80-97 Ford F-150/250/350


Hitches Available To Fit Most Popular Vehicles. Call Us For Your Specific Vehicle.



Complete Your Towing System With Hitch Balls & Mounts. See Page 6 & 7.

# WEIGHT DISTRIBUTION

## Evenly Distribute Weight Over The Entire Length Of The Vehicle & Trailer. Improve Handling & Control.

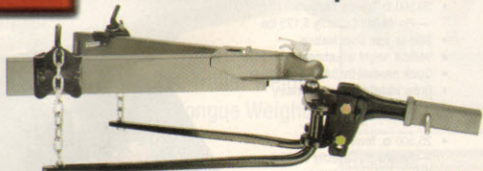

### Pro Series™ RB2 (Weight Dist. w/Hitch Bar)

The innovative Pro Series™ RB2 weight distribution is engineered to provide the features you expect in a weight distribution kit at an economical price.


Part No.	Description	Gross Trailer	Wt. Tongue Wt.
49568	Weight Distributing Hitch	10,000 lbs.	600 lbs.
49569	Weight Distributing Hitch	10,000 lbs.	800 lbs.
49570	Weight Distributing Hitch	12,000 lbs.	1,200 lbs.

Note: Hitch ball is sold separately

**REESE**  
The Quality 14820 People

Complete your towing package with a Brake Control. See page 9.

Most states require a brake control when towing.

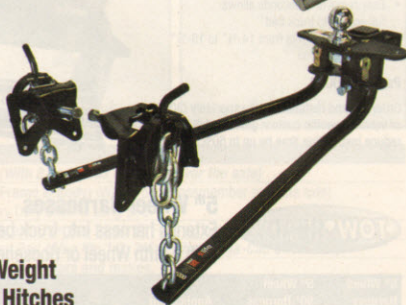

**eaz lift**  
BY GAMCO


### Round Bar Weight Distributing Hitches Includes Bolt-Together Adjustable Shank

All necessary parts come with each hitch including hook-up brackets, spring bars, chains, ball mount, shank and hitch pin, clip and bolt package. Hitch Ball ordered separately.

Part No.	Tongue Weight	Max Gross Trailer Weight Rating
48050	400 lbs.	4,000 lbs.
48051	550 lbs.	10,000 lbs.
48052	750 lbs.	10,000 lbs.
48053	1000 lbs.	10,000 lbs.
48054	1400 lbs.	14,000 lbs.

### Equal-i-zer Sway Control Hitch

The Original Equal-i-zer® Sway Control Hitch, with 4-Point Sway Control™, helps the driver be in control and the passengers be at ease. It has been specially designed to tackle the three biggest problems found with conventional trailer hitches: trailer sway, weight distribution, and complicated hook-ups.

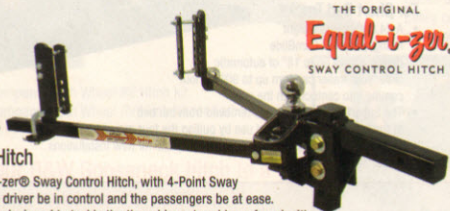

THE ORIGINAL  
**Equal-i-zer**  
SWAY CONTROL HITCH

Part No.	Description	Max Tongue Weight	Max Trailer Weight
90000400	Equal-i-zer w/ Std. Shank	400 lb.	4,000 lb.
90000600	Equal-i-zer w/ Std. Shank	600 lb.	6,000 lb.
90001000	Equal-i-zer w/ Std. Shank	1,000 lb.	10,000 lb.
90001200	Equal-i-zer w/ Std. Shank	1,200 lb.	12,000 lb.
90001400	Equal-i-zer w/ Std. Shank	1,400 lb.	14,000 lb.

### eaz lift Adjustable Shanks

Used in either up to down position to match the ball mount to any coupler height.



Part No.	Description	Shank Size	Length	Drop	Rise
48120	Bolt Together Hi-Low Shank	2"	10"	2.5"	5.5"
48130	Bolt Together Hi-Low Shank	2"	10"	5.75"	8.75"
48132	Bolt Together Extra Low Shank	2"	10"	9.5"	-



### Hitch Shanks

All Equal-i-zer® hitch shanks can be used in either the up (rise) or down (drop) position.

Part No.	Shank Size	Drop	Rise
90024200	2"	4"	8"
90024300	2"	6"	10"
90024400	2"	9"	13"
90024700	2-1/2"	3"	7"
90024800	2-1/2"	4"	8"

**REESE**

### Dual Cam High-Performance Sway Control

- Integrated cams into the spring bars reduce noise
- Specific attachment reference points provided
- \*Requires a Reese weight distributing hitch ordered separately

Part No. 26002 - Dual Cam High Perf. Sway Control  
\*Part No. 83660 - Pro Series Friction Sway Control Assembly & Fasteners (Boxed)



### SwayPro™

**BLUE OX**

- Built-in adjustable sway control
- Thumbscrew allows for simple, precise weight distribution adjustment
- Automatic locking snap-up brackets, no pins or clips to lose

Part No. BXW0550 - 550 lbs. tongue weight  
Part No. BXW0750 - 750 lbs. tongue weight  
Part No. BXW1000 - 1,000 lbs. tongue weight  
Part No. BXW1500 - 1,500 lbs. tongue weight



More Applications Available.

# 5TH WHEEL HITCHES...

## FOR WORK...

### 22K Select Series Fifth Wheel

- 22,000 lbs. capacity; 5,000 lb. pin weight capacity
- Easy removal in seconds allows full access to truck bed
- Adjustment heights from 14-1/4" to 18-1/4"
- Quick installation

Part No. 30033

Order rail and installation kit separately (30035) or vehicle specific custom guide install kits which reduce installation time by up to 50%.



**REESE**



**Super 5th**

- 20,500 lb. Towing Capacity
- Pin Weight Capacity 5,125 lbs.
- Side-to-side pivot feature.
- Vertical height adjustment from 14 1/2" to 17 1/2"
- Quick removal for full truck bed use.
- Order installation kit separately

Part No. 0800

- 25,500 lb. Towing Capacity
- Pin Weight Capacity 6,375 lbs.
- Side-to-side pivot feature.
- Adjustable rocker arm option
- adjusts heights from 15 1/2" to 18 1/2"
- Quick removal for full truck bed use.
- Order installation kit separately

Part No. 0503



**SuperGlide**

### For Short Bed Trucks

- A 24,000 pound weight rating, patented CamGlide design allows up to 18" of automatic slide, your trailer can turn up to 90° without coming into contact with the cab
- The SuperGlide can be easily removed from the bed of the tow vehicle for normal use by pulling the four mounting posts
- Hitch only, requires mounting kit & capture plate for new installations

Part No. 3600

### 5th Wheel Harnesses

Extends harness into truck bed for use with a Fifth Wheel or Gooseneck trailer.



5th Wheel Harness	5th Wheel 90° Harness	Application
20110	20143	99-09 Silverado/Sierra; 97-08 Ford F-150; 99-09 Ford F-250/350/450 Super Duty; 2009 Dodge Ram 1500 (w/Factory 7-Way)
20111	20132	00-09 Dodge Ram exc. '09' 1500 (w/Factory 7-Way)

### Fifth Wheel & Gooseneck Connectors

Easily routes 7-way connector functions into the truck bed.

Part No. 30133 - Ford & GM

Part No. 30137 - 95-08 Dodge

Part No. 30151 - 07-08 Tundra



## AND FOR RECREATION.



**Super 5th**

- 16,000 lb. Towing Capacity--Pin Weight Capacity 4,000 lbs.
- Side-to-side pivot feature.
- Strong, space-saving base design.
- Vertical height adjustment from 14 1/2" to 17 1/2"

Part No. 1200




**REESE**

### Pro Series™ 15K Fifth Wheel

An economy fifth wheel hitch that doesn't act like one. The Pro Series™ offers features only found in larger units. Installs and removes easily for full bed access.

- 4-way pivoting head
- Skid plate pivots 5" side-to-side for easier hookup on uneven ground and smoother towing
- Vertically adjusts from 13" to 17" to best match-up with different trailers
- Includes 30035 base rail kit

Part No. 30056 - Pro Series 15K Fifth Wheel (30035 rail & installation kit included)

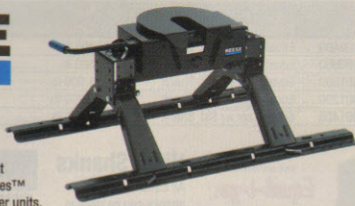

**SuperGlide**

### For Short Bed Trucks

- The 14 & 18K SuperGlide moves up to 14" while making a turn - 50% farther than manually adjusted "slider" designs and works AUTOMATICALLY, while you drive and make short turns
- Hitch only, requires mounting kit & capture plate for new installations



Part No. 4100 - 14K

Part No. 4400 - 18K

### 18K Select Plus™ Fifth Wheel

- 14" to 18" vertical height adjustment
- Features REESE® Signature Series™ head
- 4 way head pivot (front & back/side-to-side)
- 6 degree side-to-side head pivot

Part No. 30081



Order rail and installation kit separately (30035) or vehicle specific custom guide install kits which reduce installation time by up to 50%.

# GOOSENECK HITCHES



## The Original Turnover Ball™ Gooseneck Hitch

- Convert to a level bed in seconds and have full use of your truck bed!
- Precise fit and installation for all full-sized trucks
- Easy installations - No Bed Removal Required
- Only a four inch hole in the bed



18,000 lbs.  
Trailer Weight



Part No. 3000 - Companion 5th Wheel RV Hitch kit  
Part No. 3050 - Companion 5th Wheel RV Hitch kit for flatbeds

Part No.	Application
1062	01-07 Chevrolet & GMC 1 Ton Truck (With 2 bed cross members over the axle)
	07-09 Chevrolet & GMC 1 Ton (New Frame & Body) (With 1 bed crossmember over the axle)
1067	01-09 Chevrolet & GMC 3/4 Ton Heavy Duty Short & Long Bed
1108	99-09 Ford 3/4 & 1 Ton Super Duty Long and Short Bed Trucks 08 F450 w/ factory installed bed
1306	03-09 Dodge 3/4 & 1 Ton Long & Short Bed (Also fits 1/2, 3/4 & 1 ton Mega-Cab Short Bed)

Accessories also available. Also available to fit other years and makes.

## Companion™ 5TH Wheel Hitch

- Single Point Attachment Utilizing an Under-Bed Mounting System
- Easily convert to a level bed - no permanent rails mounted in your bed
- 1 1/8" locking jaws give effortless hook-up and release
- Vibration dampeners provide quiet towing experience
- Requires use of the Original Turnover Ball™ Gooseneck Hitch




Convert your B&W Gooseneck hitch to a Fifth wheel with the Companion™!




## Diamond Hitch™

- Ball inverts in place, use the whole truck bed
- Self locking ball eliminates lever in wheel well
- Optimal load placement on frame and suspension
- 30,000 lb. gross towing weight
- 7,500 lb. tongue weight capacity
- Increased turning angle

See The Blue Ox Application Guide For Specific Model Information.

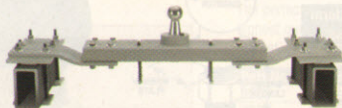

Part No.	Application
DH1304	07-09 Chevy Silverado / GMC Sierra HD, SB
DH1305	07-09 Chevy Silverado / GMC Sierra HD, LB
DH1302	99-06 Chevy Silverado / GMC Sierra HD, LB
DH1303	88-98 C/K2500 Pickups
DH1203	08-09 Ford F-250/350 Super Duty
DH1201	99-07 Ford F-250/350 Super Duty
DH1400	07-09 Toyota Tundra



## Ranch Hitch Adaptor

Converts your fifth wheel trailer to gooseneck.

Part No. 3100



## REESE Fifth Wheel Lube Plate

- Large surface for extra protection

Part No. 83002

Fifth Wheel 10" Lube Plate for Select Series™ & Pro Series™ Fifth Wheels

Part No. 83001

12" Lube Plate for Select Plus & Signature Series.



## 5TH Wheel Tailgates

Product Features:

- Tubular louvered design
- Increases your gas mileage
- Manufactured from tempered satin-coat steel
- Smooth, black, paintable finish
- Easy open/close with rotary latches and center pull handle

Part No. VEL17 - 07-09 Chevy/GMC Full Size

Part No. VEL28 - 97-09 Ford Full Size (exc. 1997 HD/04-06 F-150)

Part No. VEL37 - 03-09 Dodge Full Size (exc. 2009 inc. 02 1500)

See Page 10 for 5th Wheel Security.

# HITCH BALLS

## Complete Your Towing System With The Proper Ball Mount And Hitch Ball Setup.

### Use This Chart To Find The Proper Fitment For Hitch Balls

#### Selecting The Right Hitch Ball


- Selecting the right hitch ball is a must for trouble-free towing. Always use the properly rated hitch ball for your towing system.
- Your towing system's maximum weight rating is always equal to the lowest rated item in the system.
  - Your hitching system cannot be upgraded to a rating higher than the maximum rating of your hitch.

For example, a 3,500 lbs. ball on a 2,000 lbs. max trailer weight-rated hitch does not increase your towing capacity to 3,500 lbs. Your hitching system is still rated at 2,000 lbs. Conversely, a 2,000 lbs. ball on a 3,500 lbs. max trailer weight-rated hitch decreases your maximum towing capacity to 2,000 lbs.

The hitch ball diameter (A) must be the same diameter as the trailer coupler (1-7/8", 2", or 2-5/16"). The shank diameter (B) of the hitch ball should be the same as the hole diameter in the ball mount. The shank length (C) should be long enough to allow at least two threads to be visible when the hitch ball is installed and the nut completely tightened.

Ball Dia. (A)	Shank Dia. (B)	Shank Length (C)	Ball Mount Thickness	GVWR Rating	Zinc Part No.	Chrome Part No.	Bulk (6) Chrome Part No.
1-7/8"	3/4"	1-1/2"	3/8"-5/8"	2,000	63811	63810	—
1-7/8"	1"	2-1/8"	3/8"-3/4"	2,000	63817	63816	—
2"	3/4"	1-1/2"	3/8"-5/8"	3,500	63821	63820	—
2"	1"	2-1/8"	3/8"-3/4"	6,000	63827	63826	—
2"	1-1/4"	2-3/4"	3/8"-1"	8,000	63831	63830	—
2-5/16"	1"	2-1/8"	3/8"-3/4"	6,000	63833	63832	63832006
2-5/16"	1-1/4"	2-3/4"	3/8"-1"	12,000	63835	63834	—
2-5/16"	1-1/4"	2-3/4"	3/8"-1"	14,000	—	63836	—
2-5/16"	1-1/4"	2-3/4"	3/8"-1"	17,000	—	63838	—

# Ultra Frame or Titan receiver and ball mount must be used to achieve 14,000 lbs. rating. Consult tow vehicle owners manual for maximum towing capacities.

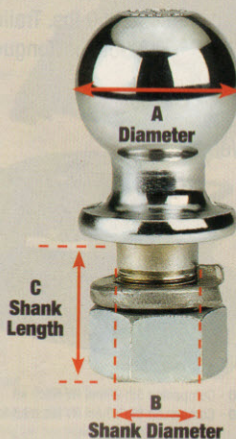


### Valley Forged Trailer Balls

Chrome Finish Part No.	Ball Dia.	Shank Dia.	Shank Length	Gross Loads	Ball Platform Thickness
50010	1-7/8"	3/4"	1-3/4"	2,000 lbs.	3/8"-3/4"
50500*	1-7/8"	3/4"	2-5/16"	2,000 lbs.	1/2"-1-3/8"
50470*	1-7/8"	3/4"	3-3/8"	2,000 lbs.	1/2"-2-7/16"
50660	1-7/8"	1"	2-1/8"	2,000 lbs.	3/8"-1-7/8"
50090	1-7/8"	1"	2-7/8"	2,000 lbs.	3/4"-1-7/8"
50030	2"	3/4"	1-3/4"	3,500 lbs.	3/8"-3/4"
50520*	2"	3/4"	2-5/16"	3,500 lbs.	1/2"-1-3/8"
50490*	2"	3/4"	3-3/8"	3,500 lbs.	1/2"-2-7/16"
50280	2"	1"	2-1/8"	6,000 lbs.	3/8"-3/4"
50110	2"	1"	2-7/8"	6,000 lbs.	3/4"-1-7/8"
51830	2"	1-1/4"	2-1/4"	7,500 lbs.	1/2"-3/4"
50290	2-5/16"	1"	2-1/8"	6,000 lbs.	3/8"-3/4"
50670	2-5/16"	1-1/4"	2-1/4"	10,000 lbs.	3/8"-3/4"
50210	2-5/16"	1-1/4"	2-1/4"	12,000 lbs.	3/8"-3/4"

\*Required for certain step bumper equipped pickups with ball platforms thicker than 3/4".

- Check bumper thickness
- Always use a lockwasher and tighten nut w/torque wrench to proper torque
- Read and follow all instructions on ball package



### RAPID HITON

#### Greaseless HardBall

The Greaseless HardBall eliminates the need to grease the coupler while giving you a smoother tow. No more grease on your pants! Fits all ball mounts with a 1" shank hole.

- Part No. 3661 — 1-7/8" Ball 5,000 lb.
- Part No. 3662 — 2" Ball 8,000 lb.
- Part No. 3663 — 2-5/16" Ball 8,000 lb.



#### Stainless Steel Hitch Balls

- Part No. 63852 — 2" x 1", 6,000 lbs.
- Part No. 63853 — 2-5/16" x 1", 6,000 lbs.






# BALL MOUNTS



## Tow & Stow Receiver Hitch


The B&W Tow & Stow™ Receiver Hitch  
The only hitch you'll ever need!

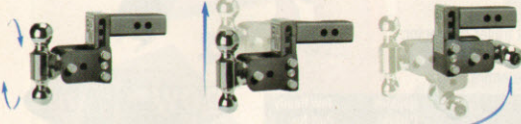

**Rotate the Ball**      **Adjust the Height**      **Stow the Hitch**

- Raise or lower in 1 inch increments
- Up to 10,000 lbs. Trailer Weight, 1,000 lbs. Tongue Weight


Part No.	Drop	Actual Adjustment		Ball Size	Rating
		Rise	Drop		
6" Model					
TS10033B	3 Inches	3-1/2 Inches	2-5/16" x 2"	Class IV	
TS10047B	3 Inches	3-1/2 Inches	2" x 1-7/8" x 2-5/16"	Class IV	
8" Model					
TS10037B	5 Inches	5-1/2 Inches	2-5/16" x 2"	Class IV	
10" Model					
TS10040B	7 Inches	7-1/2 Inches	2-5/16" x 2"	Class IV	
TS10049B	7 Inches	7-1/2 Inches	2" x 1-7/8" x 2-5/16"	Class IV	

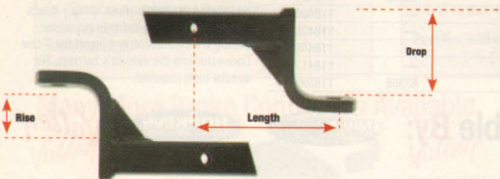

## Use This Diagram To Find The Proper Fitment For Ball Mounts

### Measuring For The Proper Ball Mount

1. Measure From The Ground To The Top Of The Hitch.
2. Measure From The Ground To The (Inside) Top Of The Trailer Coupler, When Level.
3. Subtract The Height Of The Hitch Ball (Most Are 2-1/2" - 3" High) From Coupler Measurement.
4. The Difference In The Two Measurements Is The Amount Of Ball Mount "Rise" Or "Drop" Required.

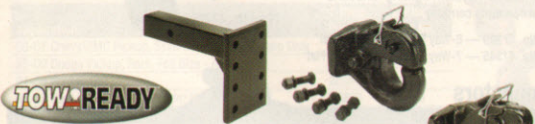

## Pintle Hooks & Mounts

- Converts receivers for use with Pintle-Type trailers, quickly and easily
- Provides mounting for both ball and Pintle and Rigid type Pintle Hooks
- Includes Grade 8 Hardware

Part No.	Description
63057	Pintle Hook Receiver Mount, Solid Shank, 7-5/8" L, 1,200/12,000 lbs. (TW/GTW)
63011	Pintle Hook w/2" Ball, Ball/Hook Rating 10,000/16,000 lbs. (GTW)
63012	Pintle Hook w/2-5/16" Ball, Ball/Hook Rating 14,000/16,000 lbs. (GTW)
63014	10 Ton Regular Pintle Hook
63015	15 Ton Regular Pintle Hook

## Adjustable All Purpose Ball Mounts




### Rapid Hitch Adjustable Aluminum Ball Mounts

- Great looking polished aluminum.
- 1,500/10,000 lb rating.

Part No.	Description
3305	5-1/2" Rapid Hitch w/ 2"x2-5/16" AlumBall
3310	5-1/2" Rapid Hitch w/ 2"x2-5/16" Combo Ball
3311	5-1/2" Rapid Hitch w/ 1-7/8"x2" Combo Ball
3313	10" Rapid Hitch w/ 2"x2-5/16" Combo Ball
3314	10" Rapid Hitch w/ 1-7/8"x2" Combo Ball
3317	10" Rapid Hitch w/ 2"x2-5/16" AlumBall
3434	Locking Pin Set (Qty. 2)

Note: Other brands locking pins do not fit Rapid Hitch



Also Available with Greaseless Alumiball.

## Master Lock. Adjustable Height Zero Tilt Ball Mount

### A Level Trailer Equals Safer Towing!

Infinitely adjustable from a 7-3/4" drop to a 6-1/4" rise. It adjusts while the trailer is loaded on the ball mount, and its E-Z Adjust feature allows the ball mount to be raised or lowered with any 7/8" wrench, or a 3/8" square ratchet drive.

Part No. 2841AT



## Standard Ball Mounts



### Alumistinger Aluminum Ball Mounts

The perfect drop bar offering RV, boat, ATV, and utility trailer owners the highest quality available in any hitching system. Lightest drop bar on the market. Great looking polished aluminum. 800/8,000 lb rating.

Part No.	Description	Part No.	Description
3503	2" Drop	3509	8" Drop
3505	4" Drop	3511	10" Drop
3507	6" Drop		



### Class III & IV Ball Mounts

Single Shank					
Part No.	Hole	Length	Rise	Drop	Capacity
40342	1"	8-1/2"	3/4"	2"	600/6,000
40343	1"	10-1/2"	3/4"	2"	600/6,000
40344	1"	9"	2-3/4"	4"	600/6,000
40345	1"	11"	2-3/4"	4"	600/6,000
40346	1"	9-1/2"	4-3/4"	6"	600/6,000



## Valley Super Duty - Class IV Solid Forged Ball Mounts

Part No.	Weight Rating	Length	Rise	Drop
76970	10,000 lbs.	8-1/2"	1"	2"
76980	10,000 lbs.	9-1/4"	3"	4"
76990	10,000 lbs.	10-1/4"	5"	6"

Up to 10,000 lbs. gross load rating only when used with 10,000 lbs. weight carrying receiver capacity, 1-1/4" ball shank hole. Never exceed the capacity rating of the receiver hitch or vehicle towing capacity.



Up To 10,000 lbs.

# WIRING


## No More Splicing & Cutting Wires

### Get The Right Wiring Kit

#### Plug—In Simple!®

#### Vehicle Wiring Kits

- No cutting or splicing.
- Easy Do-It-Yourself, includes everything needed to complete installation to a 4-wire flat trailer connector.
- Weatherproof SAE Design.
- Modular 2-Piece System — 4-wire flat can be replaced if damaged. No need to replace entire unit.

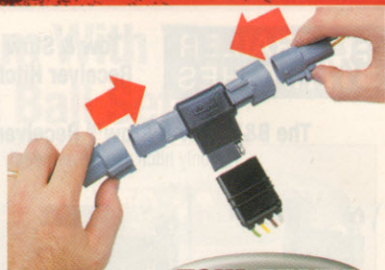

With more than 145 products covering over 1,550 vehicle applications, Tow Ready is pleased to offer the widest coverage of T-One Connectors in the industry.

Wiring Application	Hopkins Part No.	Tow Ready Part No.
08-09 Buick Enclave	—	118384
05-07 Buick Terraza	—	118396
99-09 Chevy Silverado / GMC Sierra	41145	118384
00-09 Chevy Silverado / GMC Sierra HD	40955, 40965	118384
00-06 Chevy/GMC Suburban / Tahoe / Yukon	40955 40965	118384
05-09 Chevy Uplander	—	118396
97-05 Chevy Venture / Transport / Silouette	41365	118355
04-08 Chrysler Pacifica	—	118303
07-09 Chrysler Sebring	—	118444
07-09 Dodge Caliber	—	118446
08-09 Dodge Carvan / Chrysler Town & Country	—	118446
00-08 Dodge Dakota / Durango	42205	118381
07-09 Dodge Nitro	—	118455
2009 Dodge Ram 1500	42205	119146
00-09 Dodge Ram (exc. 2009 1500)	42135	118381
05-07 Ford Five Hundred / Freestyle	—	118395
07-09 Ford Edge / Lincoln MKX	—	118430
08-09 Ford Escape / Mazda Tribute / Mercury Mariner	—	118430
05-07 Ford Escape / Maxda Tribute	40455	118426
2009 Ford F-150	—	119146
06-08 Ford F150 New Body Style	40185	119130
99-09 Ford F250/350 Super Duty	40195	119130
07-09 GMC Acadia	41155	118384

Wiring Application	Hopkins Part No.	Tow Ready Part No.
08-09 Honda Accord	—	118420
07-09 Honda CR-V	—	118427
07-09 Honda Fit	—	118420
03-08 Honda Pilot	43105	118336
07-09 Hyundai Santa Fe	—	118415
05-09 Hyundai Tucson	—	118397
2009 Jeep® Compass / Patriot	—	118446
07-09 Jeep® Grand Cherokee	42145	118425
08-09 Jeep® Liberty	40975	118455
07-09 Mazda CX-7	—	118405
04-07 Nissan Maxima	—	119130
08-09 Nissan Rogue	—	118480
04-09 Nissan Titan / Armada	40955 40965	118384
05-08 Nissan Frontier / Pathfinder / Xterra	43535	118399
07-09 Nissan Outback	—	118384
05-07 Saturn Relay	—	118396
08-09 Saturn Vue	—	118443
06-09 Subaru Tribeca	43855	118461
07-09 Toyota Camry Excl. SE	—	118405
07-09 Toyota FJ Cruiser	—	118405
08-09 Toyota Highlander	—	118449
06-09 Toyota RAV4	—	118412
05-09 Toyota Tacoma	43355	118393



#### T-One® Connectors

T-One® Connectors require no splicing of vehicle wires. Simply locate your vehicles wiring harness connector, unplug the connection and insert the T-One Connector into the vehicle's harness. No special tools required.


## Many Different Wiring Options & Kits Available By:



### Wiring Connectors & Accessories

#### 4-Way Flat Connectors

- Part No. 52030 — 4-Way Flat Connector Kit
- Part No. 52310 — 4-Way Flat Vehicle End Connector End
- Part No. 52320 — 4-Way Flat Trailer End Connector End



### Endurance™ Multi-Tow Vehicle Connector

- Multiple Towing Options from One Connector
  - 7-RV Blade, 5 & 4-Wire Flat Connections
  - Reinforced Easy-Grip Lid Opens 180° for Easier Hook-ups
  - Ultimate Weatherproofing and Corrosion Resistance
- Part No. 48470

New



### Multi-Tow® Adapters

- Provides multiple towing options from one location!
- Weatherproof molded design
- Patented

- Part No. 47185 — 4-Wire Flat to 7 RV Round and 4-Wire Flat
- Part No. 47565 — 7-Way RV Blade to BOTH 6-Round and 4-Wire Flat (center pin auxiliary)
- Part No. 47575 — 7-Way RV Blade to BOTH 6-Round and 4-Wire Flat (center pin brake)



Part No. 447565/47575



### LED Adapters

- Verifies tow system lighting functions are operating correctly

- Part No. 47325 — 6-Way Round to 4-Wire Flat
- Part No. 47345 — 7-Way RV Blade to 4-Wire Flat



Part No. 47325



### Standard Adapters

- Part No. 47185 — 4-Wire Flat to 6-Round (metal)
- Part No. 47205 — 4-Wire Flat to 7-Way RV Blade
- Part No. 47305 — 6-Way Round to 4-Flat
- Part No. 47355 — 7 RV Blade Round to 4-Flat
- Part No. 47365 — 7 RV Blade Round to 4-Flat (flexible)
- Part No. 47375 — 7 RV Blade to 5-Flat
- Part No. 47545 — 7 RV Blade to 6-Round (center pin auxiliary)
- Part No. 47555 — 7 RV Blade Round to 6-Round (center pin brake)



Part No. 47355

Part No. 47205

### Connectors

Part No.	Description	Part No.
<b>4-Wire Flats</b>		
48005	Tow Vehicle End Kit (12" wires)	
48025	Tow Vehicle End Kit (48" wires)	
48125	Trailer End Kit (48" wires)	48505
<b>2, 4, 6, 7-Way Connectors</b>		
47965	2-Pole Flat Set (12")	
48485	7-Pole RV Blade Car End (plastic)	Part No. 48485
48505	7-Pole RV Blade Trailer End (plastic)	
<b>Power Taillight Converters</b>		
46255	Isolates vehicle wiring from trailer shorts by receiving power direct from the battery	
46365	With Circuit Guardian™ (Same as 46255; plus protects itself from short circuits.)	



# BRAKE CONTROLLERS

## You've Got To STOP So You Can Arrive.

### Control Your Trailer with Confidence.

**GOOD**

**DRAW-TITE**



Lifetime Warranty

**Activator™ II**  
1 to 4 Axle Trailers  
Timer Technology

- 2, 4, 6 & 8 Brake Trailers
- Digital Output Indicator
- Thumb Wheel Output Adjustment
- Overload Indicator

Part No. 5500

**BETTER**

**Valley**



Lifetime Warranty

**Odyssey®**  
Brake Control

The Journey HD™ offers additional features not found on many other controls. Separate thumb wheel controls allow for full adjustment of both the output power and reaction time settings. Full power override capability and stop lamp illumination are incorporated into the manual activation lever to provide safe stopping for trailers with electric brake systems.

Part No. 52810 - Odyssey Trailer Brake Control for 2, 4, 6 or 8 Brake Systems

**BEST**

**TEKONSHA**



Lifetime Warranty

**HIDDEN HITCH**  
**Prodigy®** Brake Control  
1 To 4 Axle Trailers

- No manual level adjustment is necessary, it adjusts itself to varying terrains as you drive
- Applies proportional braking to the trailer and features an exclusive Boost™ feature that gives users the ability to apply more initial trailer braking power (especially when towing heavier trailers)
- For backing into tough spots this is the only inertia control that works proportionally in reverse
- Limited lifetime warranty

Part No. 39519 - Prodigy® Brake Control

Many More Brake Controllers Available.

**Valley**

Part No. 52740 - Journey HD™  
Brake Control for 1 to 4 Axle Trailers



**Valley**

Part No. 32810 - Odyssey® II,  
2, 4, 6 or 8 Brake Systems



**DRAW-TITE**

Part No. 5520 - Activator™ III, 1 to 4  
Axle Trailers, Digital Output Indicator



**HIDDEN HITCH**

**TEKONSHA**

Part No. 39526 - P-3™ Brake  
Control for 1 to 4 Axle Trailers  
(Tekonsha #90195)



**REESE**

Part No. 83520 - Brakeman™,  
1 to 4 Axle Trailers, Timed Actuated



**HIDDEN HITCH**

**TEKONSHA**

Part No. 39510 - Voyager® Brake Control




**TOW READY**

Brake Controller Harnesses

Application	1-Plug Part No.	2-Plug Part No.
03-07 Chevy/GMC Pickup, Silverado/Sierra - Classic Only	20264	22284
95-09 Dodge Pickup, Ram, Full Size - All Models	20261	22281
94-08 Ford F-150	20260	22280
08-09 Ford F-250 & F-350 Super Duty	20270	22290
03-08 Toyota 4Runner	20265	22285

Plugs into OEM harness under dash and the rear of the brake control.

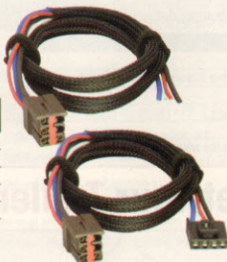

**Valley** Control Harnesses

- 10 & 12 Gauge Feed Wires Ensure Proper Amperage Throughput
- Quality OEM Connectors Ensure Proper Attachment
- Comprehensive, Fully-illustrated Installation Instructions

Application	1-Plug Part No.	2-Plug Part No.
Current Model Ford Trucks, Vans & SUV's	30400	30500
Current Model Ford Super Duty Trucks	—	30512
Current Model Dodge Trucks, Vans & SUV's	30406	30506
Current Model GM Trucks, Vans & SUV's	30410	30510

**NO**

More Splicing & Cutting,  
Use a Harness...Plug & Play!

More Applications Available. 9


# TOW BARS



**GOOD**

## Adventurer™

- Folding A-Frame tow bar
  - Adjustable arms collaps for easy storage
  - Mounts to towed vehicle baseplate
  - Quick mounting and dismounting
  - 5,000 lb. Class III rating
- Part No. BX7322

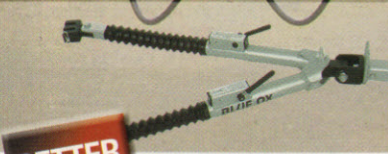

**BETTER**

## Aladdin®

- Easy fold-away aluminum motor home mount tow bar
  - Self-aligning, with 3-axis swivel design
  - The ultimate in quick disconnecting
  - 5,000 lb. Class III rating
- Part No. BX4325

**Aluminum**



# BLUE OX

## Aventa LX™

- Self-tightening pivot ball, no loose joints
  - Offset attachment points for ease of hook up/unhook
  - Spring-loaded pin locks for easy hook up and disconnect
  - 10,000 lb. Class IV rating
- Part No. BX7445

**BEST**

**10,000 lbs.**

Order Vehicle Specific Baseplate Separately.



## Accessories

**Part No. BX88191** - Universal Towing Accessories Kit  
For all tow bars! Includes receiver lock, 6 wire coiled wiring harness, car and RV plug connectors, bulb and socket wiring kit and safety cables. Includes (2) 5,000 lb. cables.

**Part No. BX88192** - Universal Towing Accessories Kit  
For all tow bars! Includes receiver lock, 6 wire coiled wiring harness, car and RV plug connectors, bulb and socket wiring kit and safety cables. Includes (2) 10,000 lb. cables.

**Part No. BX8875** - Tow Bar Cover for Aventa LX™ and Aladdin®.

Part No. BX88191



## Adjustable Tow Bars

5,000 Lbs. Adjustable Tow Bar Light-Weight, Only 31 Lbs.

- Arms adjust from 26" to 41" for universal fit
- Tow bar mounting brackets bolt securely to vehicle bumper (almost all applications will require a custom fabricated bracket due to bumper design)



Part No. 63181

Part No.	Description
63180	Adjustable Tow Bar, 5,000 lbs. GVW, incl. mounting brackets
63181	Adjustable Tow Bar, 5,000 lbs. GVW, incl. mounting brackets w/Bolt together 2-piece adjustment arms
40604	Safety Chain Kit, Class III chains rated at 5,000 lbs.
40602	Replacement Bumper Bracket Kit
2471	Wire Lock Pin

NOTE: Total weight of towed vehicle must not exceed 5,000 lbs., or must not exceed the weight of the towing vehicle.



## Adjustable Tow Bar

- 5,000 lbs
- Hardware included
- 2" Coupler
- Adapter is needed when using base plates
- Do not use a pickup or van for towing other vehicles



Part No. 74510

## Don't Forget Your Trailer Lighting!



### Trailer Lighting Kits

Comes with right & left tail lamps, 4' trunk, and 25' split Y-trailer harness.

- Part No. 651905 - 5 Round lights, w/out side markers
- Part No. 653405 - Square lights, submersible w/ side markers
- Part No. 530825 - Oval lights, submersible w/o side markers



### Magnetic Towing Kit

Comes with adjustable sealed lights w/ all-weather housings, 30' of cable and 30 lb. magnets.

Part No. 654024



# TOWING SECURITY

Whether You're **Towing Or Storing...**  
**Protect Your Trailer & Toys.**


See Page 17 for ToyLock  
 Cargo Security.



## Keyed Alike Receiver & Coupler Lock Sets

Available In Both Chrome Steel & 100% Stainless Steel

Fits all Standard 1/2" to 7/8" Span Narrow Lever Couplers. Also, Fits Trailer Doors & Latches.



Part No. T2 - 1/2" Lock  
 Part No. T3 - 5/8" Lock

Part No. SXT3 - 5/8" Stainless steel  
 Part No. SXT5 - 5/8" Stainless steel

## Maximum Security Padlocks

Part No. TRP170



Part No. THPXL

## Bent Pin Receiver Locks, Receiver Pins & Clips



Part No. SP200

Free Protective Head Cover  
 Part No. MAG200 - 5/8" Pin




Part No. SP125

## Universal Coupler Lock

- One size fits all
- Provides 360° of solid steel protection against trailer theft
- Quick & easy installation
- Huge 16mm Hardened Steel Shackles

Part No. UMAX100



## 5th Wheel Lock



Part No. TFW55  
 Security for Unattended  
 5th Wheel Trailers

## Dual Ratchet Locking System

Part No. THSP2C  
 Trailer/Shed Door Hasp



## Master Lock



## Barbell® Receiver Locks & Universal Coupler Latch

Part No. 379DAT



Part No. 1480DAT

- Part No. 1473DAT - Fits both 5/8" & 1/2" diameter receiver holes
- Part No. 1479DAT - Fits 5/8" diameter receiver holes
- Part No. 1480DAT - Stainless Steel, fits both 5/8" & 1/2" diameter receiver holes
- Part No. 378DAT - Fits 2-5/16" adj. coupler
- Part No. 379DAT - Universal Coupler Lock, fits 1-7/8", 2" and 2-5/16" couplers



Part No. 63240



## Receiver Pins & Clips

Part No. 63240 - 5/8"  
 Receiver pin & clip, packaged

Part No. 55010 - 5/8"  
 Receiver pin & clip, bulk

Part No. 63241 - 1/2"  
 Receiver pin and clip, packaged

Part No. 06237 - 1/2"  
 Receiver pin, bulk

Part No. 55515 - clip, bulk

## Master Lock



## Hitch Safe Swivel Head™ Lock

Personal safe protects keys, credit cards, and personal items while towing or not

- 4-dial set-your-own combination lock
- Receiver lock fits both 1/2" and 3/8" receiver holes
- Weather seal protects lock mechanism
- Includes extra receiver pin for towing without safe



Part No. 2989AT



Part No. 1467DAT

## Universal Heavy Duty Coupler Lock

Fits both Fixed and Adjustable style Goose Neck, 5th Wheel, and Lunette Eye couplers.

- Keyway cover protects lock from moisture and dirt
- Laminated steel frame construction
- Removable cylinder

More Applications Available. 11

# HOOKS, STRAPS, & RAMP

**KEEPER**



**New**

Part No. 05506

## Ratchet Tie-Downs

Part No. 04627  
Part No. 04637



Part No. 05519  
Part No. 05526

Part No. 05516

Part No. 05508V  
Part No. 05511

Part No. 85512

Part No. 85513

Part No. 05514

- Ratchets provide maximum tensioning with minimum force
- Hi-Test™ abrasion resistant webbing exceeds break strength and withstands the most demanding applications
- Vinyl coated hooks provide added rust protection. The safety first, spring loaded release mechanism prevents the ratchet from opening accidentally

Part No.	Break Strength	Color	Size
04622	10,000 lbs.	Yellow	2" x 27' (Not Shown)
04627	10,000 lbs.	Yellow	2" x 30'
04637	15,000 lbs.	Yellow	3" x 27'
05506	1,500 lbs.	Yellow	1" x 15' 4 Pack
05508V	900 lbs.	Red	1" x 10' 4 Pack
05511	900 lbs.	Red	1" x 10' 2 Pack
85512	1,200 lbs.	Yellow	1" x 13'
85513	1,200 lbs.	Red	1" x 13'
05514	1,500 lbs.	Blue	1" x 14'
05516	3,000 lbs.	Blue	1" x 16'
05517	1,500 lbs.	Red	2" x 14' (Not Shown)
05519	5,000 lbs.	Yellow	1-3/4" x 15'
05526	10,000 lbs.	Yellow	2" x 27'

## Auto/Race Car Tie-Down Systems

Part No. 04105

Part No. 04110

Part No. 04304

Part No. 04223



Part No. 04512



Part No. 04513

Part No. 04316

- Keeper E-Track products are designed to hold wheeled vehicles and equipment for safe and secure transportation
- Hi-Test™ Webbing will not scratch chrome or painted parts
- The 04512 over-the-wheel tie-down is designed to be used on R.V. dollies
- The 04513 over-the-wheel tie-downs is designed for tires from 6" to 9" in width

Part No.	Break Strength	Size/Description
04105	6,000 lbs.	2" x 7' w/Flat Snap Hooks
04110	6,000 lbs.	2" x 10' w/Twisted Snap Hooks
04223	6,000 lbs.	2" x 24" Axle Strap
04304	6,000 lbs.	24" E-Track, 12 Gauge Steel
04316	6,000 lbs.	2" x 7" Tie-Off w/E-Track Fitting & D-Ring
04512	6,000 lbs.	2" x 5.5' Dolly Over-the-Wheel Tie-Down
04513	6,000 lbs.	2" x 5.5' Over-the-Wheel TD fits 6" to 9" Tires

## Tow Hook Kits

- Tow hooks provide an excellent attachment point for towing and recovery products.
- Made of forged steel.
- Hooks should be mounted directly to vehicle frame.

Part No. 05618 - Black with Hardware 10,000 lbs.  
Part No. 05619 - Chrome with Hardware 10,000 lbs.



**REDART**

## Super Straps And Tie-Downs

The SuperStrap is not your ordinary recovery strap. The unique construction allows you to weave a strong loop at each end in seconds. You can easily attach it around anything and make it the perfect desired length. The pulling action makes it a non-slip grip. Easily unweave it and store when you are done.

### 1" and 2" SuperStrap

Part No. 34120 - Red, 1" X 20', LBS. 8,600

Part No. 341301 - 1" X 20', Bag, 2 Sleeves, LBS. 8,600

Part No. 342201 - 2" X 20' Kit, 2 Sleeves, 1 Bag, LBS. 20,000

Part No. 34230 - Red, 2" X 30', LBS. 20,000

Part No. 342301 - 2" X 30' Kit, 2 Sleeves, 1 Bag, LBS. 20,000



**BIG Daddy**

**Ignition**


## ATV Bi-Fold Ramp

Part No. 9038

Open Width - 45" Length - 72"

Box Size 74" x 24" x 5"

- Aluminum construction
- Never rusts
- Non-slip tread design
- Lightweight
- Ignition branded
- Foldable for easy storage
- Weight capacity: 1200 lbs

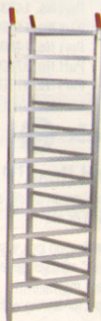

## Single Folding Ramp (Cross Bar)

Part No. 9009

Width - 11" Length - 89"

Box Size 46" x 12" x 7"

- Aluminum construction
- Never rusts
- Non-slip tread design
- Lightweight
- Ignition branded
- Foldable for easy storage
- Weight capacity: 1200 lbs/pair



**HIGHLAND**  
The Pro's Brand!

## Towing Accessories

All premium quality "Power Web" Tow Straps and Winch Straps are constructed of heavy duty, weather resistant "Power Web Plus" webbing. It's up to 4 times more cut and tear resistant than standard webbing.



12 More Applications Available.

Part No.	Description	Capacity
10146	1-3/4" x 15' Tow Strap w/hooks	10,000 lbs.
10149	1-3/4" x 25' Tow Strap w/hooks	10,000 lbs.
10152	2" x 20' Tow Strap	20,000 lbs.
10195	2" x 25' Tow Strap	20,000 lbs.
20330	3" x 30' Tow Strap	30,000 lbs.
20430	4" x 30' Tow Strap	40,000 lbs.
91615	15' Tow Rope	5,000 lbs.
91701	Tow Hook Kit w/hardware - Chrome	10,000 lbs.

**Don't See It? Just Ask!**

**We Will Be Happy To Help You With All Your Towing Needs!**



## Towing Mirrors

These mirrors are engineered to conform to the factory model in style, as well as to snap on easily without tools

Part No.	Application
80700	02-07 Ram 1500/2500/3500 (will not fit on extendable mirrors)
80800	92-07 Silverado/Sierra (Manual, Power, and Power Heated)
81800	04-08 F150 Heated or Non Heated Power mirrors (will not fit on manual or telescoping)



## Universal Towing Mirror

- Universal design fits majority of vehicles
- Installs in seconds
- Fully-enclosed mirror head reduces wind vibration
- Ratcheted tightening mechanism keeps mirror secure

Part No. 11960



## Custom Towing Mirrors

These Custom Towing Mirrors slide over your existing mirror to give you added vision for towing. Easy installation with no tools required. They are fully adjustable and do not obstruct your existing mirror.




Part No.	Application
10900	07-09 Chevy/GMC Silverado, Sierra, Tahoe, Suburban, Avalanche, Denali, Yukon, Yukon XL, Cadillac Escalade
10800	99-06 Silverado, Sierra (full size Chevy/GMC P/U) (pr), 00-06 Yukon, Tahoe, Escalade, Suburban (pr), 00-02 Jimmy, Blazer (pr), 02 Avalanche (pr)
10700	02-06 Ram 1500 (pr), 03-06 Ram 2500 & 3500 (pr)
11800	04-07 F-150 & F-250 Light Duty (pr)
11900	99-08 F-250 & F-350 Super Duty (pr), 00-08 Excursion



## Designed To Improve Your Tow Package!

### TurboWing® II

- Fuel mileage increase Guaranteed\*
- 30% Reduction in drag
- Drilling holes in cab required
- 57"W x 24"D x 20"H
- Wings are available in mirror polished stainless steel or mill finish aluminum

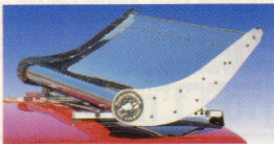

- Reduced "Bug Splatter" on the front of the trailer
- Enhances stability in windy situations
- Mounting kits sold separately

### Turbowing II Chevy, Dodge, Ford 97-Older

Part No.	Description	Body Style
11611	TurboWing II (Cab Top, Sheet Metal Mount)	Power
44303	AeroTravel I SS(Cab Top, Sheet Metal Mount)	Shear

### Ford Super Duty Trucks 98-Up

Part No.	Description	Body Style
11614	TurboWing II (Cab Top, Sheet Metal Mount)	Power

Note: Power body style has a lifetime warranty, heavy duty w/rivets (shown) Shear body style has a 2 yr. warranty, smooth finish w/o rivets



## Trailer Boxes

This box uses space not often used and helps balance your trailer for better tracking and towing. Lots of usable storage and lockable too!


- Part No. TBV34 - 34"L x 16"W x 21"H
- Part No. TBV49 - 49"L x 18"W x 21"H
- Part No. TBV34LP - Low Profile, 34" x 16" x 13"



## Transmission Coolers

Tests have proven that a 20 degree drop in transmission fluid temperature can double the life of automatic transmission components.

- Complete with all hardware, hose and fittings
- Easy-to-follow instructions
- **HIGH EFFICIENCY TURBULATOR** - Superior mixing



- Part No. 4118 - Towing, 18,000 GVW, 7 1/2" x 15" x 3/4", 6 passes
- Part No. 4120 - Heavy Towing, 20,000 GVW, 7 1/2" x 20" x 3/4", 6 passes
- Part No. 4126 - Ex. Heavy Towing, 26,000 GVW, 10" x 20" x 3/4", 8 passes



## Hitch Brake Lights

- Officially Licensed
- Fits 2" and 1-1/4" Receivers (w/adapters)

- Part No. CR007C - Chevrolet
- Part No. CR007D - Dodge
- Part No. CR007F - Ford
- Part No. CR007G - GMC



## L.E.D. Hitch Brake Lights

### With Accent Light

- Over 100,000 hours of use
- Fits 2" hitch receivers.

- Part No. CR017C - Chevrolet
- Part No. CR017D - Dodge
- Part No. CR017F - Ford
- Part No. CR017G - GMC



## Hitch Plugs

- Cast in a durable, non-corrosive, metal alloy, Hard enamel colorfill
- Bumper gasket on back assures rattle-free ride



Part No. 10068



Part No. 10180



Part No. 10026



Part No. 10030



Part No. 10073



Part No. 10023



Part No. 10155BLK



Part No. 10120

**We Would Be Glad To Help You  
Customize Your Ride.**

**Many More Styles To  
Choose From.**

# SUSPENSION

## Help Reduce Suspension Fatigue. Make Your Ride More Comfortable

### Rear Suspension Kits

Part No.	Application
Chevy/GM	
GMRCK15S	1500 Silverado, Sierra Excl. XFE 2007-09, 2/4WD
GMRCK25S	2500 Silverado, Sierra, 1999-09, 2/4WD
GMRCK35S	3500 Silverado, Sierra, 2001-09, 2/4WD
Dodge	
DR1500DS	RAM 1500, 2009, 2/4WD
DR2500CA	RAM 2500, 2003-09, 2/4WD
DR3500CA	RAM 3500, 2003-09, 2/4WD
Ford	
FR1502D	F150 Super Duty, 2009, 2WD
FR1504D	F150 Super Duty, 2009, 4WD
FR250DF	F250 Super Duty, 2005-09, 2/4WD
FR350DF	F350 Super Duty, 2005-09, 2/4WD
Toyota	
TORTUN4	TUNDRA, 2000-09, 2/4WD



**New**

- Eliminate Sway
- Optimize Load Handling
- Improve Roll Stability
- Cushion Road Shocks
- Improve Ride Comfort




## Enhance your Towing or Hauling Capabilities

### SuperSprings. Self-Adjusting Suspension Stabilizers

- Extra Load & Tow Capacity w/o Hardening the Ride
- Anti-Sway for More Cornering Control
- Reduced Wheel Hop for a Smoother Ride

- Install as Easy as 1-2-3
- 1-Raise the Vehicle
  - 2-Place SuperSpring Over Wheel
  - 3-Use Clamp and Bolt Shackles, Lower Vehicle and Drive Off!



### Adjustable Air Spring Systems

Superior air suspension solutions

### SuperDUTY 57000 Series

Air Lift's heaviest-rated kits for hauling and towing heavy loads. Engineered and built with reinforced rubber bellows and end caps made of ultra high strength Zytel® nylon (it's strong as steel but weighs less and is corrosion-proof.)



Wheel Drive	Rear Part No.	Pickups • Air Helper Springs
2 & 4	57275	01-09 Chevy/GMC Silverado/Sierra 2500 HD & 3500 1 Ton Pickup
4WD	57295	03-09 Dodge Ram 2500 & 3500 (Single & Dual Rear Wheel)
2 & 4	57294	99-09 Ford F250 & F350 Underframe kit (Fits all bed hitches)
2 & 4	57212	05-09 Ford F-250 & F-350
2 & 4	57299	07-09 Toyota Tundra

### The Level of Performance You Want, When You Want It!

#### The Firestone Advantage

- Air spring system delivers superior ride
- Has 4-layer system
- Solid girdle hoop for added strength
- Rolled crimped design for durability
- Enhance towing or hauling
- Supports up to 5000 lbs. per set



**Compressor Kit #2158 kit features:**  
Firestone's air accessory systems provide an instant onboard air source for inflating or deflating Firestone air helper springs.

Part No.	Application
2320	99-06 Chevy/GMC C&K 1500, Silverado Classic, Sierra (2WD/4WD)
2250	01-09 Chevy/GMC 2500 HD/3500 Pickup (2WD) (4WD)
2286	02-08 Dodge Ram 1500 (2WD) (4WD)
2299	03-09 Dodge Ram 2500, 3500 (2WD) (4WD)
2350	04-08 Ford F150 (2WD) (4WD)
2450	08-09 Ford F-250 over 8500 GVWR (2WD Only) (with in bed hitch)
2400	05-07 Ford F250, F350 (4WD)
2071+++	84-09 Ford F250 SD, F350 (over 8600 GVWR) (2WD) (4WD)
2176+++	99-09 Ford F350 SD, F450 SD, Cab Chassis (2WD) (4WD)
2407	05-09 Toyota Tacoma (4WD) & Prerunner

ALL KITS ARE REAR UNLESS OTHERWISE NOTED


\* Do not exceed the vehicle's GVWR

+++ Ride-Rite Kit requires 7 1/2" clearance, tire to frame



### Load Assist Springs Pro-Series Load Control

TWO IN ONE ACTION - Load Assist and Sway Control. Springs and mounting hardware all in one box. Boost towing and hauling with more capacity with less steel.

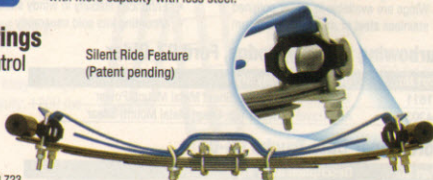

Silent Ride Feature  
(Patent pending)

Patented design.  
Patent Numbers 5,992,831-6, 1,568,723

Silent	Application
61902	99-09 Chevy/GMC Silverado & Sierra 2WD, 4WD 1500 Pickup
61901	01-09 Chevy/GMC 2500-3500 HD 2WD, 4WD Pickup (2)
61904	99-07 Ford F250-F350 4WD Old Body Style (1) 2WD, 4WD
61901	08-09 Ford F250, F350 SD Pickup 2WD, 4WD (1)
61901	03-09 Dodge 2500-3500 Series 2WD, 4WD Pickup (1)

FOOTNOTES

1) DO NOT use with Factory Overload Contact Springs (See page 4 for applications)

2) With 43" or Longer Base Leaf

NOTE: Hellwig springs are made to increase the "level-load" carrying capacity of your vehicle.

Never load the vehicle these units are installed on beyond the manufacturer's maximum gross-vehicle-weight rating.





## PowerPlant™ Dual Force HD

For Heavier Pickups

- Best in class on-board air, plus the heavy pulling power and longer winch duty cycle trucks require
- 12,000 lbs. maximum rated pull
- Geared to deliver an extra long winching duty cycle
- 80 feet of 3/8" wire rope

Part No. 71801



## PullAll Hand-Held Electric Pulling Tool

Part No. 685000 (Corded)  
Part No. 685005 (Cordless)

- Electric pulling tool that replaces come-a-longs and chain falls
- 1000 lbs. of automated force to get lifting or pulling jobs done easily
- Variable speed control trigger with forward and reverse control button
- Electronic load limiter with LED Indicator protects against overload
- At 15 lbs., PullAll is easy to use and portable



## PullAll Accessories

- PullAll Carry Bag (Part No. 685011)
- NiMH Battery for Cordless PullAll (Part No. 685013)



9.5xp

## Extreme Performance Top Of The Line. Fast And Powerful

- 9,500 lb. capacity winch features a 6 hp, High Output Parallel Series Wound motor that delivers the fastest line speed under load and longest duty cycle
- 3-stage planetary geartrain and a multi-segment cam actuated brake for positive operator control when winching
- Comes with 100' of 5/16" wire rope, hook, remote control on 12' lead, clutch, roller fairlead and battery cables

Part No. 68500



## WARN Works® 4700 Make Work Even Easier with a High Capacity Winch

- 4,700 lb. pulling capacity
  - All metal gear housing and gear train.
  - 1.9 hp. permanent magnet motor and patented split-ring gear design.
  - 60' of 7/32" wire rope with safety-clasp hook.
  - Wireless ready
- Part No. 604700



## WARN Works® 1700 A Dynamo in a Small Package

- 1,700 lb. pulling capacity
  - DC-powered, 1.6 hp. motor requires minimal amp draw
  - Clutch makes free spool simple
  - Hand-held remote controls power-in and out
  - Brake is a self-locking gear train that holds full rated load
  - Tension plate keeps wire rope tightly wound
  - Includes 35' of 3/16" wire rope with hook and fairlead
- Part No. 651700



## Utility Winch LT2000 Utility

- Powers Load In and Power Out
- Differential Planetary
- Pull and Turn Freespooling Clutch
- Low Amp, Permanent Magnet Motor
- Circuit Breaker Protected
- Heavy Duty Latched Hook with Rope Thimble
- Sealed, Handheld Switch



## Wireless Winch Control System

### Control Your Winch With No Strings (Or Wires) Attached.

The system is easy to install and a cinch to use. Comes with a receiver with an internal antenna, and all of the necessary mounting hardware is included. The weather-proof transmitter has two large buttons that make it easy to operate, even while wearing gloves, and its two-color LED provides operator feedback.

Part No. 76080 - Wireless Control System



# Don't Forget the Extras!



Part No. 61560  
19,000 lbs/8618 kgs

## Snatch Block

- Maximum capacity snatch block, with grease port and overload indicator
- For winch capacities to HS9500 with 5/16" (8mm) wire rope
- Helps reduce winch heat build up and amp draw
- Aids in angled pulls

## Receiver Shackle Bracket

- Combines a heavy-duty receiver bracket with a 3/4" shackle
  - Uses standard Class III receiver hitch as a recovery point
- Part No. 29312



## Tow Straps

- Stretch and recoil action
- Hi-Test, abrasion resistant webbing, exceeds the needs of demanding applications



## Winch Accessory Kit

- Everything you need for safe winch operation
- Includes snatch block, tree trunk protector, shackle choker chain and gloves all packed in a sturdy Cordura nylon carrying case
- Designed for winch capacities to 9.5t

Part No. 25300 - Red  
Part No. 37880 - Camouflage

- Part No. 02922 - 2" x 20'
- Part No. 02923 - 2" x 30'
- Part No. 02932 - 3" x 20'
- Part No. 02933 - 3" x 30'
- Part No. 02943 - 4" x 30'



## Heavy-Duty Winch Accessory Kit For Heavy-Duty Work (24,000 Lbs.), This Is What To Carry. Always.

- Includes snatch block, tree protector, shackle, gloves, choker chain, and 3" x 30' recovery strap.
  - All carried in compact, camouflage soft case.
- Part No. 29460 - Camouflage

## THULE SWEDEN

### Water Sport Carriers

- Proven J-style carrier maximizes load bar space for other carriers
- Great kayak protection with adjustable foam padding

Part No. 835XTR - Hullaport™

### Strap Rack Carrier

The quickest carriers to mount and remove, our strap rack carriers can haul up to three bikes, include six securing straps, and have cradle and anti-sway features to make your trip worry-free.

Part No. 962XT - Speedway Up to 3 bikes, Anti Sway Included

### Parkway Bike Carrier

- Convenient vehicle access - carrier easily tilts down
- Fits all types of bikes - dual arm design eliminates the need for top-tube adapters on certain bikes

Part No. 956 - 4 Bikes, 2" Receiver

Part No. 957 - 4 Bikes, 1-1/4" Receiver



Part No. 686XT—Atlantis™ 1600

### Atlantis Cargo Boxes

- Available in Silver Metallic or High Gloss Black
- Fits most factory roof racks and aftermarket racks

Part No.	Description	Cargo Capacity	Size
685	Atlantis 1200	12 cu. ft.	L 75", H16.5", W 25"
686/686B	Atlantis 1600	16 cu. ft.	L 69", H 17", W 32"
687/687B	Atlantis 1800	18 cu. ft.	L 77", H17.5", W 31"
688/688B	Atlantis 2100	21 cu. ft.	L 92.5", H 18", W 35.5"

### Terrapin Cargo Box

- 13 Cubic Feet, 165 lbs. carrying capacity
- Rear of vehicle access in seconds with swing-away design
- Internal cargo management system organizes your gear

Part No. 684  
Hitch Mount Cargo Box



## YAKIMA

### KingCobra

- Get easy loading, top-notch security, and the ability to carry a wide range of bikes
- Ergonomic design allows fast loading and provides hands-free adjustment



Part No. 8002084

Part No. 8003072

### Big PowderHound

- Big PowderHound holds up to 6 pairs of skis or 4 snowboards
- One-button access means you can open it as easily as saying "Open Sesame" (even with your gloves on)



Lifetime Warranty

## LUND

### Cargo Carriers and Accessories

- Hitch-mounted design for quick install
- 500 lb. distributed load capacity



Part No. 601007

Part No.	Description
601001	Cargo Carrier 21" x 61" folding
601006	Heavy Duty Storage Bag 60" x 18" x 18"
601007	Cargo Net Tie-Down
601008	Side Bars - Carrier will not fold when installed

### Freedom Grill & Grill Accessories

- 180-degree swing-out arm
- Electronic igniter
- Accepts 1 lb. or 20 lb. propane tank
- Grill 45 lbs. Swing Away Arm
- 16,000 BTU stainless steel burner



Part No. FG50 - Freedom Grill w/ Hitch Mount  
Part No. FG4PCUK - 4-Piece Utensil Set  
Part No. FG50C - Grill Cover  
Part No. FG50HA - 42" Propane Hose Adapter



### karrite Explorer Luggage Compartment

- Manufactured in High Density Polyethylene
- Convenient side opening for easy access
- Water resistant gasket
- 100 lb. load capacity



Part No. A90087 - Explorer Car Top Carrier

## HIGHLAND The Pro's Brand!

### Waterproof Kar Pak

Soft sided car top carriers are available in 10 & 15 cubic foot.

Part No. 10391 - 38" x 38" x 18"  
Part No. 10392 - 37" x 30" x 15"



## COVERCRAFT


### Pocket Pods

- Universal fit
- Seatback mount
- Each pocket has a lid w/closure latch



Part No. T01001BK - Black  
Part No. T01001CH - Charcoal


# CARGO SECURITY




## Lock It Up.

ToyLok retractable cable system has a tamper resistant design that makes it difficult for scavengers to swipe your stuff!

Part No.	Description
TL1020	18' ToyLok Cable Lock (mount not included)
TL001	2" Receiver Mount Accessory
TL002	Fifth Wheel King Pin Mount Accessory
TL003	Stake Pocket Truck Mount Accessory
TL004	Toolbox Mount Accessory



Part No. TL004



Part No. TL001



Part No. TL002



Part No. TL003

## Mounting Options

Padlock sold separately.



**For More Security  
See Page 10.**


## Index

<b>A</b>			
Adapters.....	8		
Air Lift.....	14		
Air Spring Systems.....	14		
Alfred Hitch Cover.....	1, 13		
<b>B</b>			
B&W Hitch.....	5, 7		
Back-Up Camera Systems.....	1		
Ball Mounts.....	7		
Bike/Ski Racks.....	16		
Blue Ox.....	3, 5, 10		
Brake Controllers.....	9		
Brake Controller Harnesses.....	9		
Bully/Pilot.....	13		
<b>C</b>			
Canoe/Kayak Carriers.....	16		
Cargo Carriers.....	16		
CIPA.....	13		
Class I Hitches.....	1		
Class II Hitches.....	1		
Class III Hitches.....	2		
Class IV Hitches.....	2		
Class V Hitches.....	2		
Coupler Locks.....	11		
Covercraft.....	16		
Custom-Flow.....	5		
<b>D</b>			
Drawrite.....	1, 2, 7, 9		
<b>E</b>			
Eaz Lift.....	3		
Equal-i-zer.....	3		
<b>F</b>			
5th Wheel Connectors.....	4		
5th Wheel Harnesses.....	4		
5th Wheel Hitches.....	4, 5		
5th Wheel Locks.....	11		
5th Wheel Tailgates.....	5		
5th Wheel Lube Plates.....	5		
Firestone.....	14		
Flex-A-Lite.....	13		
Freedom Grill.....	16		
<b>G</b>			
Gooseneck Connectors.....	4		
Gooseneck Hitches.....	5		
Grills.....	16		
Grote.....	10		
<b>H</b>			
Hellwig.....	14		
Hidden Hitch.....	9		
Highland.....	12, 16		
Hitch Adapters.....	5		
Hitch Covers.....	1		
Hitch Balls.....	6		
Hitch Brake Lights.....	13		
Hitch Plugs.....	13		
Hitch Shanks.....	3		
Hopkins.....	8		
<b>I</b>			
Ignition.....	12		
<b>K</b>			
K Source.....	13		
Karrite.....	16		
<b>L</b>			
Lighting Kits.....	10		
Lund.....	16		
<b>M</b>			
Master Lock.....	7, 11		
<b>P</b>			
Pintle Hooks & Mounts.....	7		
Pull Rite.....	4		
PultzAll.....	15		
<b>R</b>			
Ramps.....	12		
Rapid Hitch.....	5, 6, 7		
Receiver Locks.....	11		
Receiver Pins & Clips.....	11		
Red Art.....	12		
Reese.....	2, 3, 4, 5, 9		
<b>S</b>			
SuperSprings.....	14		
Superswinch.....	15		
Suspension Kits.....	14		
Suspension Stabilizers.....	14		
Sway Control Hitches.....	3		
Swift Hitch.....	1		
<b>T</b>			
Tekonsha.....	9		
Thule.....	16		
<b>Tie Downs</b> .....	12		
<b>Timbren</b> .....	14		
<b>Tow Bars</b> .....	10		
<b>Tow Bar Accessories</b> .....	10		
<b>Tow Hook Kits</b> .....	12		
<b>Tow Ready</b> .....	4, 6, 7, 8, 9, 10, 11		
<b>Towing Accessories</b> .....	12		
<b>Towing Mirrors</b> .....	13		
<b>ToyLok</b> .....	17		
<b>Trailer Boxes</b> .....	13		
<b>Transmission Coolers</b> .....	13		
<b>Trimax</b> .....	11		
<b>TurboWing</b> .....	13		
<b>U</b>			
<b>UWS</b> .....	13		
<b>V</b>			
<b>Valley</b> .....	1, 2, 4, 6, 7, 8, 9, 10		
<b>W</b>			
<b>Warn</b> .....	15		
<b>Weight Distribution Hitches</b> .....	3		
<b>Winches</b> .....	15		
<b>Winch Accessories</b> .....	15		
<b>Wings</b> .....	13		
<b>Wiring Accessories</b> .....	8		
<b>Wiring Connectors</b> .....	8		
<b>Wiring Kits</b> .....	8		
<b>Y</b>			
<b>Yakima</b> .....	16		

The publishers are not responsible for typographical errors. Copyright ©2009. All rights reserved. All text, graphics, pictures, logos, and the selection and arrangement thereof is the exclusive property of the Publisher, or its content supplier. No portion of this publication, including images, may be copied or reproduced in any form without the prior written consent of the Publisher.



**Adventure**

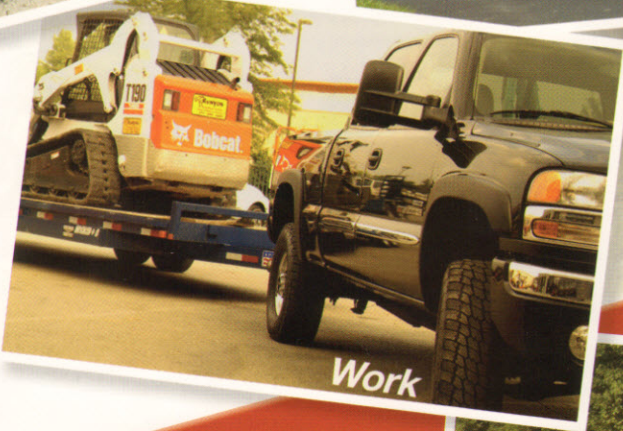

**Work**



**Your Comprehensive  
Source For Towing &  
Adventure Products**



**Play**



880268087599